

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
1 September 2005 (01.09.2005)

PCT

(10) International Publication Number
WO 2005/080040 A1

(51) International Patent Classification⁷: **B23G 1/16**,
B23B 31/08

(21) International Application Number:
PCT/KR2005/000410

(22) International Filing Date: 15 February 2005 (15.02.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10-2004-0010888 19 February 2004 (19.02.2004) KR
20-2004-0029704 21 October 2004 (21.10.2004) KR

(71) Applicant (for all designated States except US):
SUNGHUN CO., LTD. [KR/KR]; 549-43, Suknam-dong,
Seogu, Incheon-city 404-220 (KR).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **LEE, Jeung-Kyun**
[KR/KR]; 424-151, Hwagok1-dong, Kangseo-gu, Seoul
157-891 (KR).


(74) Agent: **HWANG, Sung-tag**; Ka-4410, Chungang cir-
culation complex, 1258 Kurobon-dong, Kuro-gu, Seoul
152-059 (KR).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG,
MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH,
PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: MASTER SPINDLE FOR TAPPING MACHINE

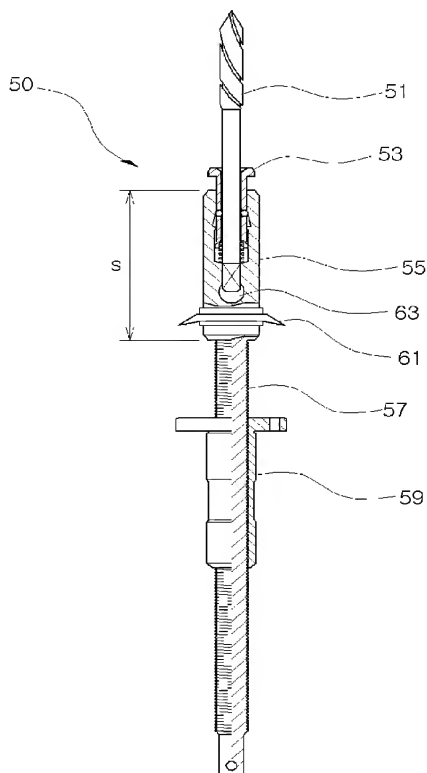

(57) Abstract: Disclosed is a master spindle for tapping machine. The master spindle comprises a chuck (53) having a tap (51) detachably mounted thereto; a chuck support member (55) having the chuck (53) mounted thereto; a spindle bolt (57) fastened to the chuck support member (55) at an upper end thereof; and a bushing nut (59) threadedly coupled to the spindle bolt (57) and positioned below the chuck support member (55). The chuck support member (55) has an upper end to which the chuck (53) is mounted and a lower end to which the spindle bolt (57) is fastened, the upper and lower ends being integrally formed with each other.

WO 2005/080040 A1



GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:

— of inventorship (Rule 4.17(iv)) for US only

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.